


Product Data Sheet Solar Panel Bracket: Beaver Tail Brick

Technical Specifications

- **Dimensions:** 433 x 70 mm
- **Weight:** 0.4 kg
- **Corrosivity class:** C4 40 years

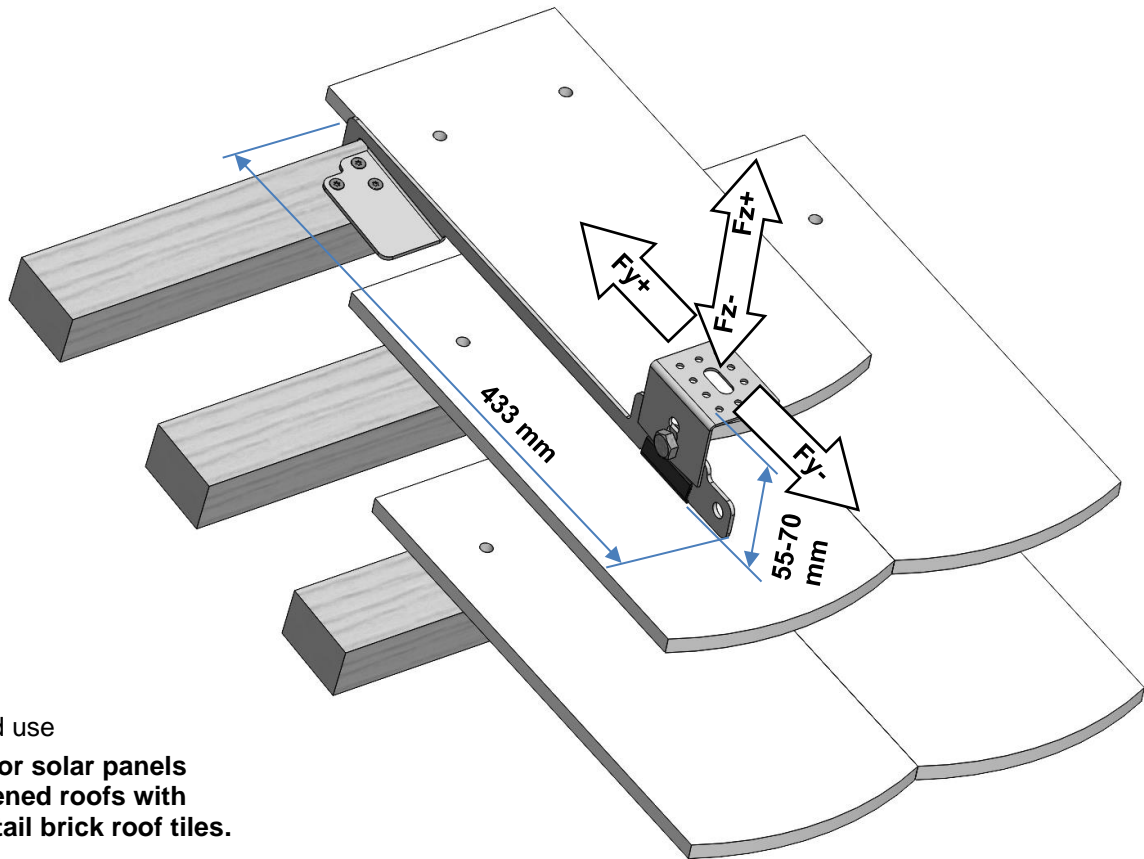

Intended use

**Mount for solar panels
on battened roofs with
beaver tail brick roof tiles.**

Accessories

- 3X Wood screws 5 x 35
- Screw M10x20 hot galv.
- Flange brackets M10 hot galv.
- EPDM

Installation Instructions: **M-357**

Test performed in accordance with: **CEN/TR 16999:2019**

Manufacturer's Name and Contact Address

CW Lundberg Industri AB, Landsvägen 52, Box 138, 792 22 Mora, Sweden

Performance

Performance		Design values for serviceable load [N]				Mechanical bracket type
		Parallel up (Fy+)	Parallel down (Fy-)	Normal up (Fz+)	Normal down (Fz-)	
load	Direction of					
Roof structure						
Load-bearing batten min 40x60 mm		400	1000	200	1500	Wood screw

Design values for serviceable loads only pertain to the mount for solar panels. Load attaches centrally to mounting plate. Load values should not be confused with roof safety performance requirements which include the batten bracket.